

VELA

Flatwork Ironers



**NON MARKING
WITH DOUBLE
MAIN BELT
SYSTEM**

(Optional)

**Green
technology**

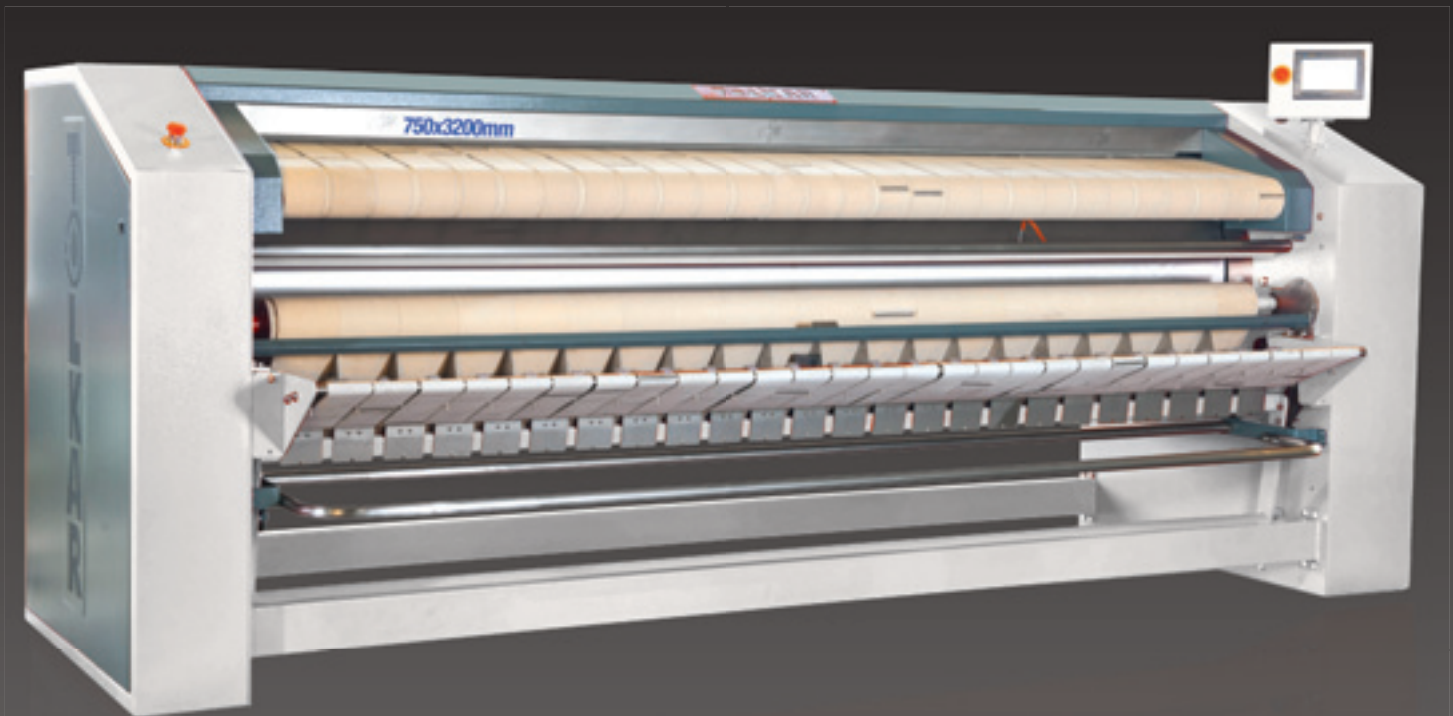

GAS HEATING
OPTIONAL IN ALL
MODELS


**PADDLE BOX & FAN
SYSTEM**
FOR HUMIDITY COLLECTION
AND DISCHARGE IN
ALL MODELS

**GENUINE
NOMEX
BELTS**

**STAINLESS
STEEL
MAIN ROLL**




(Optional)



IN BUILT FOLDING

Vela 7532 model offers 2 - 8 primary folds between 30 - 50 cm length

TOLKAR ULTIMATE CONTROL SYSTEM

-  **Remote access**, instant mobile tracking
-  **USB programme transfer**
- **5** ready recipes, **100** recipes
-  **Reporting**, amount of laundry, consumption values and working hours are being reported.
- **Smarteye** centralized control and data acquisition (Optional)



PLC Controlled
7" Touch Screen Panel

(Standard in Vela 7532)
(Optional)



ACCORDING TO TEXTILE TYPES

VELOCITY CONTROLLED ROLLS

(Standard in Vela 7532)
(Optional)

AUTOMATIC TEXTILE LENGTH MEASUREMENT

(Standard in Vela 7532)
(Optional)

VELA

Flatwork Ironers

320 - 500 - 550 - 650 mm
Roll Diameter



		Vela 3218	Vela 5520	Vela 5525	Vela 5530	Vela 5532
Heating Type		Electric	Elc./Steam/Gas	Elc./Steam/Gas	Elc./Steam/Gas	Elc./Steam/Gas
Cylinder Diameter	(mm)	320	550	550	550	550
Cylinder Width	(mm)	1.800	2.000	2.500	3.000	3.200
Ironing Capacity	(Kg/hour)	30-35	65-75	85-105	90-120	90-120
Working Speed	(m/min)	2-6	3,5/10,5	3,5/10,5	3,5/10,5	3/9
Motor Power	(Kw)	0,37	1,1	1,1	0,55/0,55/1,1	0,55/0,55/1,1
Fan Motor Power	(Kw)	0,37	0,37	0,37	0,37/0,37/2x0,37	0,37/0,37/2x0,37
Elec. Heating Power	(Kw)	15	22,5	27	31,5	31,5
Steam Consumption	(Kg/hour)	-	45	50	55	55
Gas Heat Power	(Kcal/hour)	-	26.400	28.875	31.350	31.350
Width	(mm)	2.385	2.589/2.823/2.966	3.089/3.323/3.466	3.589/3.823/3.966	3.930/3.930/4.090
Depth	(mm)	1.012	1.196/1.196/1.334	1.196/1.196/1.334	1.196/1.196/1.334	1.150/1.200/1.200
Height	(mm)	992	1.523/1.523/1.569	1.523/1.523/1.569	1.523/1.523/1.569	1.355/1.355/1.675
Weight	(Kg)	500	930	1.050	1.170	1.360

Tolkar reserves changing the technical specifications of the machines due to technological necessities without prior notice


Capacities are given for the laundry extracted at 300 G force.

It is recommended that textiles keeping more water and moisture due to thickness or knit raw material should be pre dried in the dryers before ironing.

VELA
Flatwork Ironers

750 - 950 - 1200 mm
Roll Diameter



		Vela 7520	Vela 7525	Vela 7530	Vela 7532 	Vela 9530	Vela 12030
Heating Type		Elc./Steam/Gas	Elc./Steam/Gas	Elc./Steam/Gas	Elc./Steam/Gas	Elc./Steam/Gas	Elc./Steam/Gas
Cylinder Diameter	(mm)	750	750	750	750	950	1.200
Cylinder Width	(mm)	2.000	2.500	3.000	3.200	3.000	3.000
Ironing Capacity	(Kg/hour)	80-100	90-120	120-150	100-130	160-200	200-250
Working Speed	(m/min)	4,5/13,5	4,5/13,5	4,5/13,5	3/9	6-18	7-22
Motor Power	(Kw)	1,1	1,1	1,1	1,1	2,2/2,2/2x1,5	2,2/2,2/2x1,5
Fan Motor Power	(Kw)	0,37/0,37/0,37	0,37/0,37/0,37	0,37/0,37/2x0,37	0,37/0,37/0,75	3/3/0,37+3	3/3/0,37+3
Elec. Heating Power	(Kw)	30	37,5	42	54	72	84
Steam Consumption	(Kg/hour)	65	70	75	80	100	150
Gas Heat Power	(Kcal/hour)	31.350	31.350	34.650	49.500	66.000	82.500
Width	(mm)	2.835/2.995/2.995	3.335/3.425/3.425	3.685/3.870/4.010	3.987/3.987/4.207	4.113/4.113/4.400	4.137/4.137/4.156
Depth	(mm)	1.400/1.450/1.540	1.400/1.450/1.540	1.697/1.697/1.714 (2.260)(2.260)(2.405)	1.564/1.564/1.679	2.038/2.038/2.038 (3.016)(3.016)(3.016)	2.203/2.203/2.079 (3.181) (3.181)(3.057)
Height	(mm)	1.850/1.800/2.170	1.850/1.850/2.170	1.697/1.697/1.714	1.564/1.564/1.679	2.764/2.764/2.247	3.042/3.042/2.971
Weight	(Kg)	1.475	1.600	1.725	1.920	2.525/2.525/2.325	3.990/ 3.990/3.640

Tolkar reserves changing the technical specifications of the machines due to technological necessities without prior notice

Capacities are given for the laundry extracted at 300 G force.

It is recommended that textiles keeping more water and moisture due to thickness or knit raw material should be pre dried in the dryers before ironing.